


[Pneumatic suction and blowing pumps combined PA140÷200 with PS140÷200]

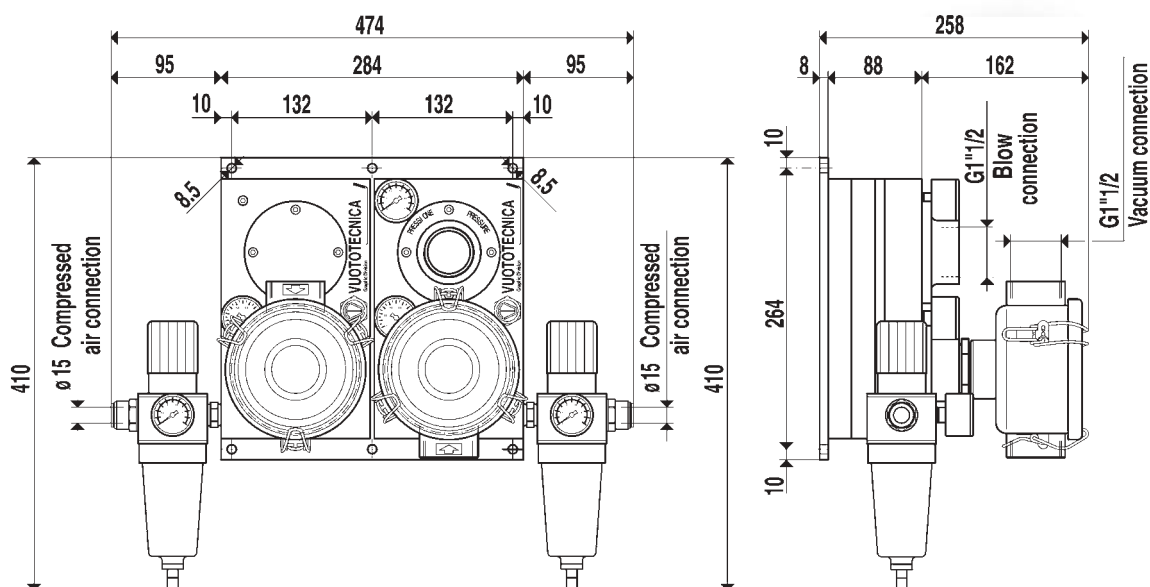

Art.	PA 140						Art.	PS 140							
Supply pressure	bar (g)	1	2	3	4	5	6	Supply pressure	bar (g)	1	2	3	4	5	6
Maximum vacuum level	-KPa	15	35	55	70	85	90	Maximum blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	4.0	6.0	8.0	9.6	11.2	12.8	Air consumption	NI/s	4.0	6.0	8.0	9.6	11.2	12.8
Vacuum air flow capacity	cum/h	45	80	105	125	140	150	Blow air capacity	cum/h	59	101	134	160	180	196
Weight	Kg	7.2						Weight	Kg	7.3					

Art.	PA 170						Art.	PS 170							
Supply pressure	bar (g)	1	2	3	4	5	6	Supply pressure	bar (g)	1	2	3	4	5	6
Maximum vacuum level	-KPa	15	35	55	70	85	90	Maximum blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	5.0	7.5	10.0	12.0	14.0	16.0	Air consumption	NI/s	5.0	7.5	10.0	12.0	14.0	16.0
Vacuum air flow capacity	cum/h	50	92	120	140	155	170	Blow air capacity	cum/h	68	119	156	183	205	228
Weight	Kg	7.2						Weight	Kg	7.3					

Art.	PA 200						Art.	PS 200							
Supply pressure	bar (g)	1	2	3	4	5	6	Supply pressure	bar (g)	1	2	3	4	5	6
Maximum vacuum level	-KPa	15	35	55	75	85	90	Maximum blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	6.0	9.0	12.0	14.4	16.8	19.2	Air consumption	NI/s	6.0	9.0	12.0	14.4	16.8	19.2
Vacuum air flow capacity	cum/h	60	110	142	170	188	198	Blow air capacity	cum/h	82	142	185	222	248	268
Weight	Kg	7.2						Weight	Kg	7.3					

Working temperature	°C	-20/+80						Working temperature	°C	-20/+80					
---------------------	----	---------	--	--	--	--	--	---------------------	----	---------	--	--	--	--	--

N.B.: All the values shown in the table are valid at normal atmospheric pressure of 1013 mbar (a) and obtained with a constant supply pressure.