




[Cups with ball valve, self-locking support and release button]

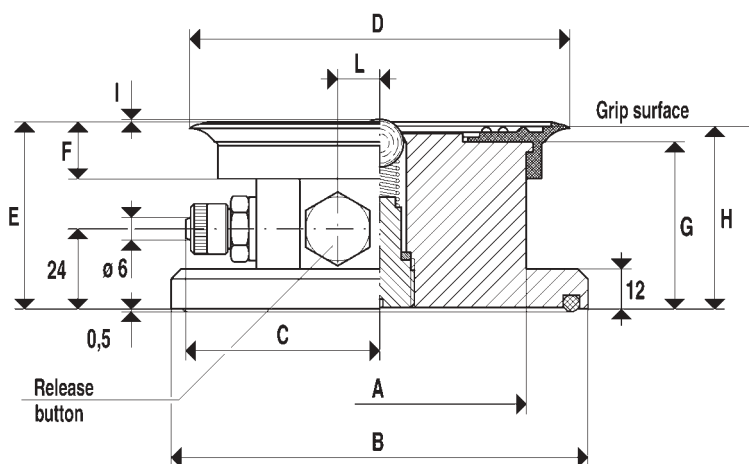

These cups represent a real movable stirrup system.

They consist of:

- A sturdy support in anodized aluminium with a wide surface at the base, delimited by a packing which has the purpose to fasten it to the bearing surface.
- A standard flat cup, cold assembled on the upper part of the support, for the grip of the load to be clamped.
- A ball valve having the feature to open, and therefore to produce vacuum inside the cup, only when the load to be kept actuates the sealing ball.
- Two semi-rapid fittings for the connection to vacuum.
- A release button which allows positioning of the support also when vacuum is connected.

The vacuum interception for the grip and detachment of the support from the bearing surface and for the grip and the release of the load, can be done by means of vacuum valves or three-way solenoid valves.

All the cups with self-locking support of this series and of the other series have the grip surface situated at the same height and therefore can be used together regardless of their shape or size.

Art.	Force Kg.	A Ø	B Ø	C	D Ø	E	F	G	H	I	L
21 110 10	24	88	125	58	114	56.0	17	50.0	54.5	1	10
21 150 10	45	120	165	76	154	57.5	23	49.5	54.5	1	28