


[3-way vacuum double solenoid valves]

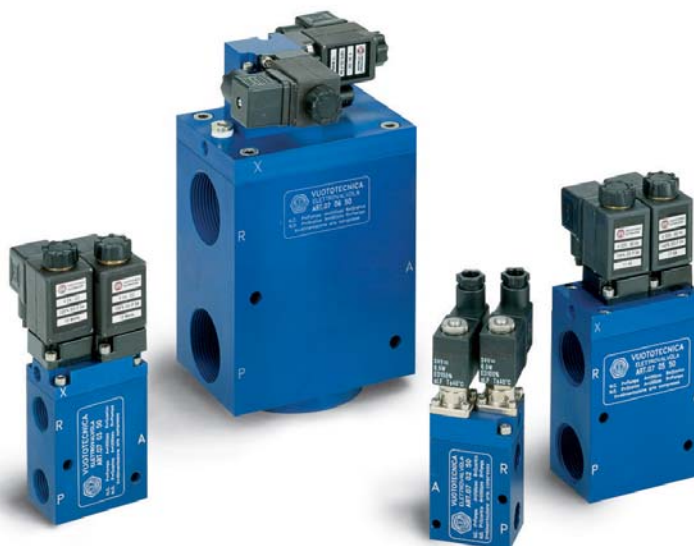

These solenoid valves have the same function as the three-way servo controlled ones, previously described.

They have the same structure as well.

The feature that differentiates them are the two solenoids which, with a simple electrical impulse, exchange the valves position and keep them in this position until when there is a new impulse, and this also in absence of compressed air at the servo control and of electric current too.

Due to this feature, their use is particularly advisable in all those cases where it is required the maximum guarantee of connection to the vacuum source, also in absence of electric or pneumatic feed.

Working pressure: from 0 to 3 bar abs.


Pressure at the servo control: from 4 to 8 bar (g).

The electric coils are standard, completely plasticized in synthetic resin, tight execution, insulation class F (up to 155°C) electrical connections by means of a plug with clamping screws.

Acceptable tolerance on the nominal value of the voltage $\pm 10\%$.

Max. input: 7,5 ÷ 17 V.A. with A.C. and 5 ÷ 10 Watt with D.C.

Coils may be rotated through 360°.

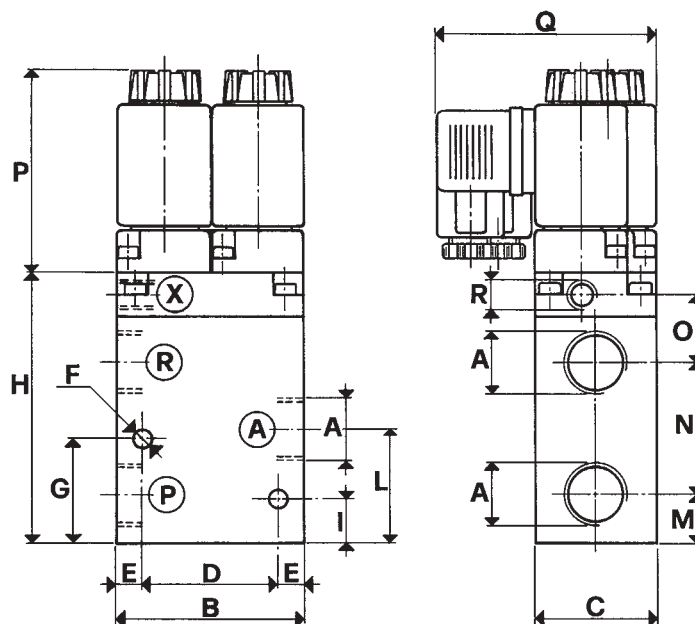

Art.	A Ø	Ø Orif.	B	C	D	E	F Ø	G	H	I	L	M	N	O	R Ø	P	Q
07 01 50	1/4"	8.5	50	35	40	5.0	5.5	30	75	10	32.5	12.5	35.0	21	1/8"	65	70
07 02 50	3/8"	11.5	50	35	40	5.0	5.5	30	75	10	32.5	12.5	35.0	21	1/8"	65	70
07 03 50	1/2"	15.0	62	40	45	8.5	6.5	35	91	15	38.5	16.5	44.0	23	1/8"	67	72
07 04 50	3/4"	19.0	80	50	60	10.0	6.5	51	115	21	51.5	21.0	59.5	27	1/8"	67	72
07 05 50	1"	25.0	80	50	60	10.0	6.5	51	115	21	51.5	21.0	59.5	27	1/8"	67	72
07 06 50	1 1/2"	40.0	130	90	100	15.0	8.5	84	175	35	84.0	39.0	90.0	40	1/8"	55	130